

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : E21B	A2	(11) International Publication Number: WO 00/04269 (43) International Publication Date: 27 January 2000 (27.01.00)												
(21) International Application Number: PCT/US99/16150 (22) International Filing Date: 15 July 1999 (15.07.99) (30) Priority Data: <table border="0"><tr><td>60/092,908</td><td>15 July 1998 (15.07.98)</td><td>US</td></tr><tr><td>60/095,188</td><td>3 August 1998 (03.08.98)</td><td>US</td></tr><tr><td>60/101,541</td><td>23 September 1998 (23.09.98)</td><td>US</td></tr><tr><td>60/108,601</td><td>16 November 1998 (16.11.98)</td><td>US</td></tr></table> (71) Applicant: DEEP VISION LLC [US/US]; 10th floor, 4 Greenway Plaza, Houston, TX 77046 (US). (72) Inventors: FINCHER, Roger; 23B Amherst Court, Conroe, TX 77304-1103 (US). WATKINS, Larry; 10915 Tulip Garden Court, Houston, TX 77065-3230 (US). MAY, Roland; Koenigsbergerstrasse 9, D-29225 Celle (DE). MCFARLANE, James, W.; 20203 Kempfords Court, Katy, TX 77450 (US). FONTANA, Peter; 3918 Byron, Houston, TX 77005 (US). (74) Agents: ROWOLD, Carl, A. et al.; Baker Hughes Incorporated, Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).		60/092,908	15 July 1998 (15.07.98)	US	60/095,188	3 August 1998 (03.08.98)	US	60/101,541	23 September 1998 (23.09.98)	US	60/108,601	16 November 1998 (16.11.98)	US	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>
60/092,908	15 July 1998 (15.07.98)	US												
60/095,188	3 August 1998 (03.08.98)	US												
60/101,541	23 September 1998 (23.09.98)	US												
60/108,601	16 November 1998 (16.11.98)	US												
(54) Title: SUBSEA WELLBORE DRILLING SYSTEM FOR REDUCING BOTTOM HOLE PRESSURE (57) Abstract The present invention provides drilling systems for drilling subsea wellbores. A suction pump coupled to the annulus is used to control the bottom hole pressure during drilling operations, making it possible to use heavier drilling muds and drill to greater depths than would be possible without the suction pump. Various pressure, temperature, flow rate and kick sensors included in the drilling system provide signals to a controller that controls the suction pump, the surface mud pump, a number of flow control devices, and the optional delivery system.														

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

SUBSEA WELLBORE DRILLING SYSTEM FOR REDUCING BOTTOM HOLE PRESSURE

REFERENCE TO CORRESPONDING APPLICATIONS

5 This application claims benefit of U.S. Provisional Application No.
60/108,601, filed November 16, 1998, U.S. Provisional Application No.
60/101,541, filed September 23, 1998, U.S. Provisional Application No.
60/092,908, filed, July 15, 1998 and U.S. Provisional Application No.
60/095,188, filed August 3, 1998.

10

BACKGROUND OF THE INVENTION

Field of the Invention

 This invention relates generally to oilfield wellbore systems for
performing wellbore operations and more particularly to subsea downhole
15 operations at an offshore location in which drilling fluid is continuously
circulated through the wellbore and which utilizes a fluid return line that
extends from subsea wellhead equipment to the surface for returning the
wellbore fluid from the wellhead to the surface. Maintenance of the fluid
pressure in the wellbore during drilling operations at predetermined pressures
20 is key to enhancing the drilling operations.

Background of the Art

 Oilfield wellbores are drilled by rotating a drill bit conveyed into the
wellbore by a drill string. The drill string includes a drilling assembly (also
25 referred to as the "bottom hole assembly" or "BHA") that carries the drill bit.

The BHA is conveyed into the wellbore by tubing. Continuous tubing such as coiled tubing or jointed tubing is utilized to convey the drilling assembly into the wellbore. The drilling assembly usually includes a drilling motor or a "mud motor" that rotates the drill bit. The drilling assembly also includes a variety of sensors for taking measurements of a variety of drilling, formation and BHA parameters. A suitable drilling fluid (commonly referred to as the "mud") is supplied or pumped under pressure from the surface down the tubing. The drilling fluid drives the mud motor and discharges at the bottom of the drill bit. The drilling fluid returns uphole via the annulus between the drill string and the wellbore inside and carries pieces of formation (commonly referred to as the "cuttings") cut or produced by the drill bit in drilling the wellbore.

For drilling wellbores under water (referred to in the industry as "offshore" or "subsea" drilling) tubing is provided at the surface work station (located on a vessel or platform). One or more tubing injectors or rigs are used to move the tubing into and out of the wellbore. Injectors may be placed at the sea surface and/or on the wellhead equipment at the sea bottom. In riser-type drilling, a riser, which is formed by joining sections of casing or pipe, is deployed between the drilling vessel and the wellhead equipment and is utilized to guide the tubing to the wellhead. The riser also serves as a conduit for fluid returning from the wellhead to the sea surface. Alternatively, a return line, separate and spaced apart from the tubing, may be used to return the drilling fluid from the wellbore to the surface.

During drilling, the operators attempt to carefully control the fluid density at the surface so as to ensure an overburdened condition in the wellbore. In other words, the operator maintains the hydrostatic pressure of the drilling fluid in the wellbore above the formation or pore pressure to avoid well blow-out. The density of the drilling fluid and the fluid flow rate control largely determine the effectiveness of the drilling fluid to carry the cuttings to the surface. For such purpose, one important downhole parameter controlled is the equivalent circulating density ("ECD") of the fluid at the wellbore bottom. The ECD at a given depth in the wellbore is a function of the density of the drilling fluid being supplied and the density of the returning fluid which includes the cuttings at that depth.

When drilling at offshore locations where the water depth is a significant fraction of the total depth of the wellbore, the absence of a formation overburden causes a reduction in the difference between pore fluid pressure in the formation and the pressure inside the wellbore due to the drilling mud. In addition, the drilling mud must have a density greater than that of seawater so then if the wellhead is open to seawater, the well will not flow. The combination of these two factors can prevent drilling to certain target depths when the full column of mud is applied to the annulus. The situation is worsened when liquid circulation losses are included, thereby increasing the

solids concentration and creating an ECD of the return fluid even greater than the static mud weight.

In order to be able to drill a well of this type to a total wellbore depth at a subsea location, the bottom hole ECD must be reduced. One approach to do so is to use a mud filled riser to form a subsea fluid circulation system utilizing the tubing, BHA, the annulus between the tubing and the wellbore and the mud filled riser, and then inject gas (or some other low density liquid) in the primary drilling fluid (typically in the annulus adjacent the BHA) to reduce the density of fluid downstream (i.e., in the remainder of the fluid circulation system). This so-called "dual density" approach is often referred to as drilling with compressible fluids.

Another method for changing the density gradient in a deepwater return fluid path has been proposed, but not used in practical application. This approach proposes to use a tank, such as an elastic bag, at the sea floor for receiving return fluid from the wellbore annulus and holding it at the hydrostatic pressure of the water at the sea floor. Independent of the flow in the annulus, a separate return line connected to the sea floor storage tank and a subsea lifting pump delivers the return fluid to the surface. Although this technique (which is referred to as "dual gradient" drilling) would use a single fluid, it would also require a discontinuity in the hydraulic gradient line between the sea floor storage tank and the subsea lifting pump. This requires close monitoring and control of the pressure at the subsea storage tank, subsea

hydrostatic water pressure, subsea lifting pump operation and the surface pump delivering drilling fluids under pressure into the tubing for flow downhole. The level of complexity of the required subsea instrumentation and controls as well as the difficulty of deployment of the system has delayed (if not altogether prevented) the practical application of the "dual gradient" system.

SUMMARY OF THE INVENTION

The present invention provides wellbore systems for performing subsea downhole wellbore operations, such as subsea drilling as described more fully hereinafter, as well as other wellbore operations, such as wellbore reentry, intervention and recompletion. Such drilling system includes tubing at the sea level. A rig at the sea level moves the tubing from the reel into and out of the wellbore. A bottom hole assembly, carrying the drill bit, is attached to the bottom end of the tubing. A wellhead assembly at the sea bottom receives the bottom hole assembly and the tubing. A drilling fluid system continuously supplies drilling fluid into the tubing, which discharges at the drill bit and returns to the wellhead equipment carrying the drill cuttings. A pump at the surface is used to pump the drilling fluid downhole. A fluid return line extending from the wellhead equipment to the surface work station transports the returning fluid to the surface.

In the preferred embodiment of the invention, an adjustable pump is provided coupled to the annulus of the well. The lift provided by the adjustable

pump effectively lowers the bottom hole pressure. In an alternative embodiment of the present invention, a flowable material, whose fluid density is less than the density of the returning fluid, is injected into a return line separate and spaced from the tubing at one or more suitable locations in the return line
5 or wellhead. The rate of injection of such lighter material can be controlled to provide additional regulation of the pressure the return line and to maintain the pressure in the wellbore at predetermined values throughout the tripping and drilling operations.

10 Some embodiments of the drilling system of this invention are free of subsea risers that usually extend from the wellhead equipment to the surface and carry the returning drilling fluid to the surface. Fluid flow control devices may also be provided in the return line and in the tubing. Sensors make measurements of a variety of parameters related to conditions of the return
15 fluid in the wellbore. These measurements are used by a control system, preferably at the surface, to control the surface and adjustable pumps, the injection of low density fluid at a controlled flow rate and flow restriction devices included in the drilling system. In other embodiments of the invention, subsea risers are used as guide tubes for the tubing and a surge tank or stand
20 pipe in communication with the return fluid in the flow of the fluid to the surface.

These features (in some instances acting individually and other instances acting in combination thereof) regulate the fluid pressure in the borehole at predetermined values during subsea downhole operations in the wellbore by operating the adjustable pump system to overcome at least a portion of the hydrostatic pressure and friction loss pressure of the return fluid. Thus, these features enable the downhole pressure to be varied through a significantly wider range of pressures than previously possible, to be adjusted far faster and more responsively than previously possible and to be adjusted for a wide range of applications (i.e., with or without risers and with coiled or jointed tubing). In addition, these features enable the bottom hole pressure to be regulated throughout the entire range of downhole subsea operations, including drilling, tripping, reentry, recompletion, logging and other intervention operations, which has not been possible earlier. Moreover, the subsea equipment necessary to effect these operational benefits can be readily deployed and operationally controlled from the surface. These advantages thus result in faster and more effective subsea downhole operations and more production from the reservoir, such as setting casing in the wellbore.

Examples of the more important features of the invention have been summarized (albeit rather broadly) in order that the detailed description thereof that follows may be better understood and in order that the contributions they represent to the art may be appreciated. There are, of course, additional

features of the invention that will be described hereinafter and which will form the subject of the claims appended hereto.

BRIEF DESCRIPTION OF THE DRAWINGS

5 For detailed understanding of the present invention, reference should be made to the following detailed description of the preferred embodiment, taken in conjunction with the accompanying drawings, in which like elements have been given like numerals:

10 **FIG. 1** is a schematic elevational view of a wellbore system for subsea downhole wellbore operations wherein fluid, such as a drilling fluid, is continuously circulated through the wellbore during drilling of the wellbore and wherein a controlled lift device is used to regulate the bottom hole ECD through a wide range of pressures.

15 **FIG. 2** is a schematic illustration of the fluid flow path for the drilling system of **FIG. 1** and the placement of certain devices and sensors in the fluid path for use in controlling the pressure of the fluid in the wellbore at predetermined values and for controlling the flow of the returning fluid to the surface.

20

FIG. 3 is a schematic similar to **FIG. 2** showing another embodiment of this invention utilizing a tubing guide tube or stand pipe as a surge tank.

FIGS. 4A-4C illustrate the pressure profiles obtained by using the present invention compared to prior art pressure profiles.

5 **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

FIG. 1 shows a schematic elevational view of a drilling system **100** for drilling subsea or under water wellbores **90**. The drilling system **100** includes a drilling platform, which may be a drill ship **101** or another suitable surface work station such as a floating platform or a semi-submersible. Various types of work stations are used in the industry for drilling or performing other wellbore operations in subsea wells. A drilling ship or a floating rig is usually preferred for drilling deep water wellbores, such as wellbores drilled under several thousand feet of water. To drill a wellbore **90** under water, wellhead equipment **125** is deployed above the wellbore **90** at the sea bed or bottom **121**.
10 The wellhead equipment **125** includes a blow-out-preventer stack **126**. A lubricator (not shown) with its associated flow control valves may be provided over the blow-out-preventer **126**. The flow control valves associated with the lubricator control the discharge of the returning drilling fluid from the lubricator.

20

 The subsea wellbore **90** is drilled by a drill bit carried by a drill string, which includes a drilling assembly or a bottom hole assembly ("BHA") **130** at the bottom of a suitable tubing, such as continuous tubing **142**. It is

contemplated that jointed tubing may also be used in the invention. The continuous tubing 142 is spooled on a reel 180, placed at the vessel 101. To drill the wellbore 90, the BHA 130 is conveyed from the vessel 101 to the wellhead equipment 125 and then inserted into the wellbore 90. The tubing 142 is moved from the reel 180 to the wellhead equipment 125 and then moved into and out of the wellbore 90 by a suitable tubing injection system. FIG. 1 shows one embodiment of a tubing injection system comprising a first or supply injector 182 for feeding a span or loop 144 of tubing to the second or main tubing injector 190. A third or subsea injector (not shown) may be used at the wellhead to facilitate injection of the tubing 142 in the wellbore 90.

Installation procedures to move the bottom hole assembly 130 into the wellbore 90 is described in U.S. Patent No. 5,738,173, commonly assigned with this application.

The primary purpose of the injector 182 is to move the tubing 142 to the injector 190 and to provide desired tension to the tubing 142. If a subsea injector is used, then the primary purpose of the surface injector 190 is to move the tubing 142 between the reel 180 and the subsea injector. If no subsea injector is used, then the injector 190 is used to serve the purpose of the subsea injector. For the purpose of this invention any suitable tubing injection system may be utilized.

To drill the wellbore 90, a drilling fluid 20 from a surface mud system 22 (see FIG. 2, for details) is pumped under pressure down the tubing 142. The fluid 20 operates a mud motor in the BHA 130 which in turn rotates the drill bit. The drill bit disintegrates the formation (rock) into cuttings. The drilling fluid 20 leaving the drill bit travels uphole through the annulus between the drill string and the wellbore carrying the drill cuttings. A return line 132 coupled to a suitable location at the wellhead 125 carries the fluid returning from the wellbore 90 to the sea level. As shown in FIG. 2, the returning fluid discharges into a separator or shaker 24 which separates the cuttings and other solids from the returning fluid and discharges the clean fluid into the suction or mud pit 26. In the prior art methods, the tubing 142 passes through a mud filled riser disposed between the vessel and the wellhead, with the wellbore fluid returning to the surface via the riser. Thus, in the prior art system, the riser constituted an active part of the fluid circulation system. In one aspect of the present invention, a separate return line 132 is provided to primarily return the drilling fluid to the surface. The return line 132, which is usually substantially smaller than the riser, can be made from any suitable material and may be flexible. A separate return line is substantially less expensive and lighter than commonly used risers, which are large diameter jointed pipes used especially for deep water applications and impose a substantial suspended weight on the surface work station. FIG. 2 shows the fluid flow path during the drilling of a wellbore 90 according to the present invention.

In prior art pumping systems, pressure is applied to the circulating fluid at the surface by means of a positive displacement pump 28. The bottom hole pressure (BHP) can be controlled while pumping by combining this surface pump with an adjustable pump system 30 on the return path and by controlling the relative work between the two pumps. The splitting of the work also means that the size of the surface pump 28 can be reduced. Specifically, the circulating can be reduced by as much as 1000 to 3000 psi. The limit on how much the pressure can be lowered is determined by the vapor pressure of the return fluid. The suction inlet vapor pressure of the adjustable pumps 28 and 30 must remain above the vapor pressure of the fluid being pumped. In a preferred embodiment of the invention, the net suction head is two to three times the vapor pressure of the fluid to prevent local cavitation in the fluid.

More specifically, the surface pump 28 is used to control the flow rate and the adjustable pump 30 is used to control the bottom hole pressure, which in turn will affect the hydrostatic pressure. An interlinked pressure monitoring and control circuit 40 is used to ensure that the bottom hole pressure is maintained at the correct level. This pressure monitoring and control network is, in turn, used to provide the necessary information and to provide real time control of the adjustable pump 30.

Referring now to FIG. 2, the mud pit 26 at the surface is a source of drilling fluid that is pumped into the drill pipe 142 by surface pump 28. After

passing through the tubing 142, the mud is used to operate the BHA 130 and returns via the annulus 146 to the wellhead 125. Together the tubing 142, annulus 146 and the return line 132 constitutes a subsea fluid circulation system.

5

The adjustable pump 30 in the return line provides the ability to control the bottom hole pressure during drilling of the wellbore, which is discussed below in reference to FIGS. 4A - 4C. A sensor P1 measures the pressure in the drill line above an adjustable choke 150 in the tubing 142.

10

A sensor P2 is provided to measure the bottom hole fluid pressure and a sensor P3 is provided to measure parameters indicative of the pressure or flow rate of the fluid in the annulus 146. Above the wellhead, a sensor P4 is provided to measure parameters similar to those of P3 for the fluid in the return line and a controlled valve 152 is provided to hold fluid in the return line 132. In operation, the control unit 40 and the sensor P1 operate to gather data relating to the tubing pressure to ensure that the surface pump 28 is operating against a positive pressure, such as at sensor P5, to prevent cavitation, with the control unit 40 adjusting the choke 150 to increase the flow resistance it offers and/or to stop operation of the surface pump 28 as may be required. Similarly, the control system 40 together with sensors P2, P3 and/or P4 gather data, relative to the desired bottom hole pressure and the pressure and/or flow rate of the fluid in the return line 132 and the annulus 146, necessary to achieve a

15

20

predetermined downhole pressure. More particularly, the control system acting at least in part in response to the data from sensors P2, P3 and/or P4 controls the operation of the adjustable pump 30 to provide the predetermined downhole pressure operations, such as drilling, tripping, reentry, intervention and recompletion. In addition, the control system 40 controls the operation of the fluid circulation system to prevent undesired flow of fluid within the system when the adjustable pump is not in operation. More particularly, when operation of the pumps 28, 30 is stopped a pressure differential may be resident in the fluid circulation system tending to cause fluid to flow from one part of the system to another. To prevent this undesired situation, the control system operates to close choke 150 in the tubing, valve 152 in the return line or both devices.

The adjustable pump 30 preferably comprises a centrifugal pump. Such pumps have performance curves that provide more or less a constant flow rate through the adjustable pump system 30 while allowing changes in the pressure increase of fluid in the pump. This can be done by changing the speed of operation of the pump 30, such as via a variable speed drive motor controlled by the control system 40. The pump system may also comprise a positive displacement pump provided with a fluid by-pass line for maintaining a constant flow rate through the pump system, but with control over the pressure increase at the pump. In the FIG. 2 embodiment of the invention, the adjustable pump

system 30 may be used with the separate return line 132, as shown, or may be used in conjunction with the conventional mud-filled riser (not shown).

FIG. 3 shows an alternative lifting system intended for use with a return line 132, such as that shown, that is separate and spaced apart from the tubing 142. In this embodiment, a flowable material of lower density than the return fluid from a suitable source 60 thereof at the surface is injected in the return fluid by a suitable injector 62 in the subsea circulation system to lift the return fluid and reduce the effective ECD and bottom hole pressure. The flowable material may be a suitable gas such as nitrogen or a suitable liquid such as water. Like the adjustable pump system 30, the injector 62 is preferably used in conjunction with sensors P1, P2, P3, P4 and/or P5 and controlled by the control system 40 to control the bottom hole pressure. In addition, the injection system may constitute the sole lift system in the fluid circulation system, or is used in conjunction with the adjustable pump system 30 to overcome at least a portion of the hydrostatic pressure and friction loss pressure of the return fluid.

FIG. 3 also shows a tube 70 extending from the surface work station 101 down to the wellhead 125 that may be employed in the fluid circulation system of this invention. However, in contrast to the conventional mud-filled riser, the tube 70 rather serves as a guide tube for the tubing 142 and a surge tank selectively used for a limited and unique purpose as part of the fluid circulation system. More particularly the tube 70 serves to protect the tubing

142 extending through the turbulent subsea zone down to the wellhead. In addition, the tube has a remotely operated stripper valve 78 that when closed blocks fluid flow between the return line 132 and the annulus 146 and when opened provides fluid flow communication into the interior of the tubing from the return line and the annulus. Thus, with the stripper valve closed, the fluid circulation system operates in the manner described above for the FIGS. 2 and 3 embodiments of this invention, in which there is a direct correspondence of the flow rate of fluid delivered to the system by the surface pump 28 and fluid flowing past the adjustable pump system 30 or injector 62. However, in contrast to this closed system, when the stripper valve 78 is opened, an open system is created offering a unique operating flexibility for a range of pressures in the fluid circulation system at the wellhead 125 at or above sea floor hydrostatic pressure. More particularly, with the stripper valve open, the tube 70 operates as a surge tank filled in major part by sea water 76 and is also available to receive return flow of mud if the pressure in the fluid circulation system at the wellhead 125 is at a pressure equal to or greater than sea floor hydrostatic pressure. At such pressures, the mud/water 72 rises with the height of the column 74 adjusting in response to the pressure changes in the fluid circulation system. This change in the mud column also permits the flow rate of the fluid established by the adjustable pump system 30 or injector 62 to differ from that of the surface pump 28. This surge capacity provides time for the system to adjust to pump rate mismatches that may occur in the system and to do so in a self-adjusting manner. Further critical pressure downhole

measurements of the fluid circulation system may be taken at the surface via the guide tube 70. More particularly, as the height of the mud column 74 changes, the column of water 76 is discharged (or refilled) at the surface work station 101. Measuring this surface flow of water such as at a suitable flowmeter 80
5 provides a convenient measure of the pressure of the return fluid at the wellhead 125.

The use of the adjustable pump 30 (or controlled injector 62) is discussed now with reference to FIGS. 4A-4C. FIG. 4A shows a plot of
10 static pressure (abscissa) against subsea and then wellbore depth (ordinate) at a well. The pore pressure of the formation in a normally pressured rock is given by the line 303. Typically drilling mud that has a higher density than water is used in the borehole to prevent an underbalanced condition leading to blow-out of formation fluid. The pressure inside the borehole is represented by 305.
15 However, when the borehole pressure 305 exceeds the fracture pressure **FP** of the formation, which occurs at the depth 307, further drilling below depth 307 using the mud weight corresponding to 305 is no longer possible.

With conventional fluid circulation systems, either the density of the
20 drilling mud must be decreased and the entire quantity of heavy drilling mud displaced from the circulation system, which is a time consuming and costly process, or a steel casing must be set in the bottom of the wellbore 307, which is also time consuming and costly if required more often than called for in the

wellbore plan. Moreover, early setting of casing causes the well to telescope down to smaller diameters (and hence to lower production capacity) than otherwise desirable.

5 **FIG. 4B** shows dynamic pressure conditions when mud is flowing in the borehole. Due to frictional losses due to flow in the drillstring, shown at line P_D , and in the annulus, shown at line P_A , the pressure at a depth 307 is given by a value 328, i.e., defining an effective circulating density (ECD) by the pressure gradient line 309. The pressure at the bottom of the hole 328 exceeds the
10 static fluid hydrostatic pressure 305 by an additional amount over and above the fracture pressure FP shown in **FIG. 4A**. This excess pressure P_A is essentially equal to the frictional loss in the annulus for the return flow. Therefore, even with drilling fluid of lower density than that for gradient line 305 circulating in the circulation system, a well cannot be drilled to the depth
15 indicated by 307. With enough pressure drop due to fluid friction loss, drilling beyond the depth 307 may not be possible even using only water.

 Prior art methods using the dual density approach seek to reduce the effective borehole fluid pressure gradient by reducing the density of the fluid in
20 the return line. It also illustrates one of the problems with relying solely upon density manipulation for control of bottom hole pressure. Referring to **FIG. 4B**, if circulation of drilling mud is stopped, there are no frictional losses and the effective fluid pressure gradient immediately changes to the value given by

the hydrostatic pressure 305 reflecting the density of the drilling fluid. There maybe the risk of losing control of the well if the hydrostatic pressure is not then somewhat above the pore pressure in order to avoid an inrush of formation fluids into the borehole. Pressure gradient line 311 represents the
5 fluid pressure in the drilling string.

FIG. 4C illustrates the effect of having a controlled lifting device (i.e., pump 30 or injector 62) at a depth 340. The depth 340 could be at the sea floor or lower in the wellbore itself. The pressure profile 309 corresponds to
10 the same mud weight and friction loss as 309 in FIG. 4B. At the depth corresponding to 340, a controlled lifting device is used to reduce the annular pressure from 346 to 349. The wellbore and the pressure profile now follow pressure gradient line 347 and give a bottom hole pressure of 348, which is below the fracture pressure FP of the formation. Thus, by use of the present
15 invention, it is possible to drill down to and beyond the depth 307 using conventional drilling mud, whereas with prior art techniques shown in FIG. 4C it would not have been possible to do so even with a drilling fluid of reduced density.

20 There are a number of advantages of this invention that are evident. As noted above, it is possible to use heavier mud, typically with densities of 8 to 18 lbs. per gallon for drilling: the heavier weight mud provides lubrication and is also better able to bring up cuttings to the surface. The present invention

makes it possible to drill to greater depths using heavier weight mud. Prior art techniques that relied on changing the mud weight by addition of light-weight components take several hours to adjust the bottom hole pressure, whereas the present invention can do so almost instantaneously. The quick response also
5 makes it easier to control the bottom hole pressure when a kick is detected, whereas with prior art techniques, there would have been a dangerous period during which the control of the well could have been lost while the mud weight is being adjusted. The ability to fine-tune the bottom hole pressure also means that there is a reduced risk of formation damage and allow the wellbore to be
10 drilled and casing set in accordance with the wellbore plan.

While the foregoing disclosure is directed to the preferred embodiments of the invention, various modifications will be apparent to those skilled in the art. It is intended that all variations within the scope and spirit of the appended
15 claims be embraced by the foregoing disclosure.

WHAT IS CLAIMED IS:

- 1 1. A method of performing downhole subsea wellbore operations utilizing
2 a wellbore system having a tubing, a bottom hole assembly carried on the
3 tubing adjacent the lower end thereof, a subsea wellhead assembly at the top of
4 the wellbore receiving the tubing and bottom hole assembly, and a fluid return
5 line extending from the wellhead assembly to the sea level, the method of
6 drilling comprising positioning the bottom hole assembly in the wellbore below
7 the wellhead assembly, pumping a fluid down the tubing to the bottom hole
8 assembly, flowing wellbore return fluid through an annulus between the tubing
9 and the wellbore to the wellhead and up the return line from the wellhead to the
10 sea level, with the tubing, annulus, wellhead assembly and return line
11 constituting a subsea fluid circulation system, the improvement comprising:
 - 12 (a) providing an adjustable pump system in fluid flow
13 communication with said annulus; and
 - 14 (b) regulating the fluid pressure at the bottom of the borehole at
15 predetermined values during downhole operations in the
16 wellbore by operating the adjustable pump system to overcome
17 at least a portion of the hydrostatic pressure and friction loss
18 pressure of the return fluid.
- 1 2. The method of claim 1 wherein regulating the fluid pressure in the
2 borehole further comprises blocking flow of return fluid or the flow of
3 fluid in the tubing when the adjustable pump system is not in operation.

- 1 3. The method of claim 1 further comprising:
- 2 (a) sensing an operating parameter of the fluid circulation system
- 3 indicative of the pressure or flow rate of the fluid in the fluid
- 4 circulation system;
- 5 (b) transmitting a signal representative of the sensed parameter; and
- 6 (c) controlling the adjustable pump system at least in part based on
- 7 said signal.
- 1 4. The method of claim 1 wherein the pressure of the borehole is regulated
- 2 at predetermined values below the fracture pressure of the formation.
- 1 5. The method of claim 1 wherein the pressure of the borehole is regulated
- 2 at predetermined values above the pore pressure of the formation.
- 1 6. A wellbore system for performing subsea downhole wellbore operations
- 2 at an
- 3 offshore location comprising tubing receiving fluid under pressure adjacent the
- 4 upper end thereof, a bottom hole assembly adjacent the lower end of the
- 5 tubing, a subsea wellhead assembly at the top of the wellbore receiving the
- 6 tubing and the bottom hole assembly, said wellhead assembly adapted to
- 7 receive said fluid after it has passed down through said tubing and back up
- 8 through an annulus between the tubing and the wellbore, and a fluid return line

9 extending up from the wellhead assembly to the sea level for conveying return
10 fluid from the wellhead to the sea level, with the tubing, annulus, wellhead and
11 return line constituting a subsea fluid circulation system, the improvement
12 comprising:

13 an adjustable pump system in fluid communication with said annulus for
14 regulating the bottom hole pressure at predetermined values during
15 downhole operations in the wellbore to overcome at least a portion of
16 the hydrostatic pressure and friction loss pressures of the return fluid.

17

1 7. The wellbore system of claim 6 further comprising a flow control
2 devices in the subsea fluid circulation system, one device in the tubing
3 or in communication with the return fluid to block flow of fluid in the
4 subsea fluid circulation system when the adjustable pump system is not
5 in operation.

1 8. The wellbore system of claim 7 wherein said one flow control device in
2 the tubing is a remotely actuated choke for maintaining positive
3 pressure of the fluid at the surface.

1 9. The wellbore system of claim 6 further comprising:

2 (a) at least one sensor for sensing an operating parameter of the
3 subsea fluid circulation system indicative of the pressure or flow
4 rate of fluid in the fluid circulation system;

- 5 (b) a transmitter for transmitting a signal representative of the
6 sensed parameter; and
7 (c) a controller for controlling the operation of the adjustable pump
8 based at least in part on said signal.

1 10. A method of drilling a subsea wellbore utilizing a drilling system having
2 tubing, a
3 bottom hole assembly carried adjacent the lower end of the tubing, a subsea
4 wellhead assembly at the top of the wellbore receiving the tubing and bottom
5 hole assembly, and a fluid return line separate and spaced apart from the tubing
6 extending from the wellhead assembly to the sea level, with the tubing, annulus,
7 wellhead assembly and return line constituting a circulation system, the method
8 of drilling comprising positioning the bottom hole assembly in the wellbore
9 below the wellhead assembly, pumping drilling fluid down the tubing to the
10 bottom hole assembly and flowing wellbore return fluid through an annulus
11 between the tubing and the wellbore to the wellhead and up the return line from
12 the wellhead to the sea level, the improvement comprising:
13 regulating the fluid pressure in the borehole at predetermined values
14 during downhole operations in the wellbore by injecting flowable
15 material of a lower density than the return fluid to overcome at least a
16 portion of the hydrostatic pressure and friction loss pressure of the
17 return fluid.

18

1 11. The method of claim 10 wherein regulating the fluid pressure in the
2 borehole further comprises blocking flow of the return fluid in the
3 circulation system or the flow of the drilling fluid in the tubing when the
4 lower density flowable material is not being injected.

1 12. A wellbore system for performing downhole subsea operations in a
2 wellbore at an
3 offshore location, comprising tubing receiving fluid under pressure adjacent the
4 upper end thereof, a bottom hole assembly adjacent the lower end of the
5 tubing, a subsea wellhead assembly at the top of the wellbore receiving the
6 tubing and the bottom hole assembly, said wellhead assembly adapted to
7 receive said fluid after it has passed down through said tubing and back up
8 through the annulus between the tubing and the wellbore and a fluid return line
9 separate and spaced apart from the tubing extending up from the wellhead
10 assembly to the sea level for conveying return fluid from the wellhead to the
11 sea level, with the tubing, annulus, wellhead and return line constituting a
12 subsea fluid circulation system, the improvement comprising:

13 (a) an adjustable fluid lift in fluid communication with the subsea
14 fluid circulation system for regulating the fluid pressure at
15 predetermined values during downhole operations in the
16 wellbore by overcoming at least a portion of the hydrostatic
17 pressure and friction loss pressures of the return fluid; and

18 (b) a fluid surge vessel extending up from adjacent the wellhead to
19 the surface and in fluid communication with return fluid from
20 the annulus, said vessel holding a lower column of return fluid
21 and an upper column of water with the height of the column of
22 return fluid indicative of the differential pressure of the return
23 fluid and the sea water adjacent the wellhead.

24

1 13. The wellbore system of claim 12 further comprising a valve adjacent the
2 wellhead to block fluid communication between return fluid from the
3 annulus and the fluid surge vessel.

4

1 14. The wellbore system of claim 12 wherein the fluid surge vessel is a
2 stand pipe.

1 15. The wellbore system of claim 12 further comprising a sensor for
2 measuring a parameter indicative of the volume of water flowing into
3 and out of the vessel, with changes in the pressure of the return fluid
4 adjacent the wellhead.

1/4

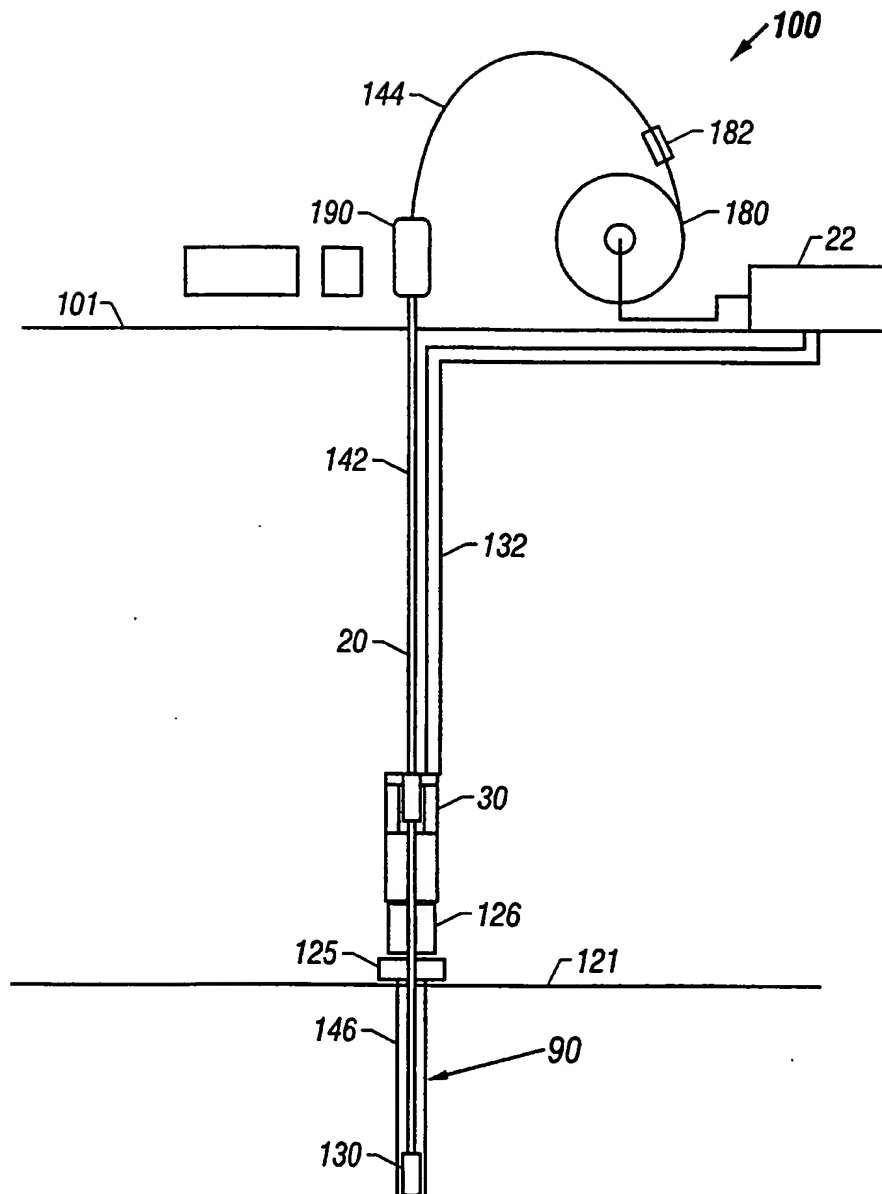


FIG. 1

2/4

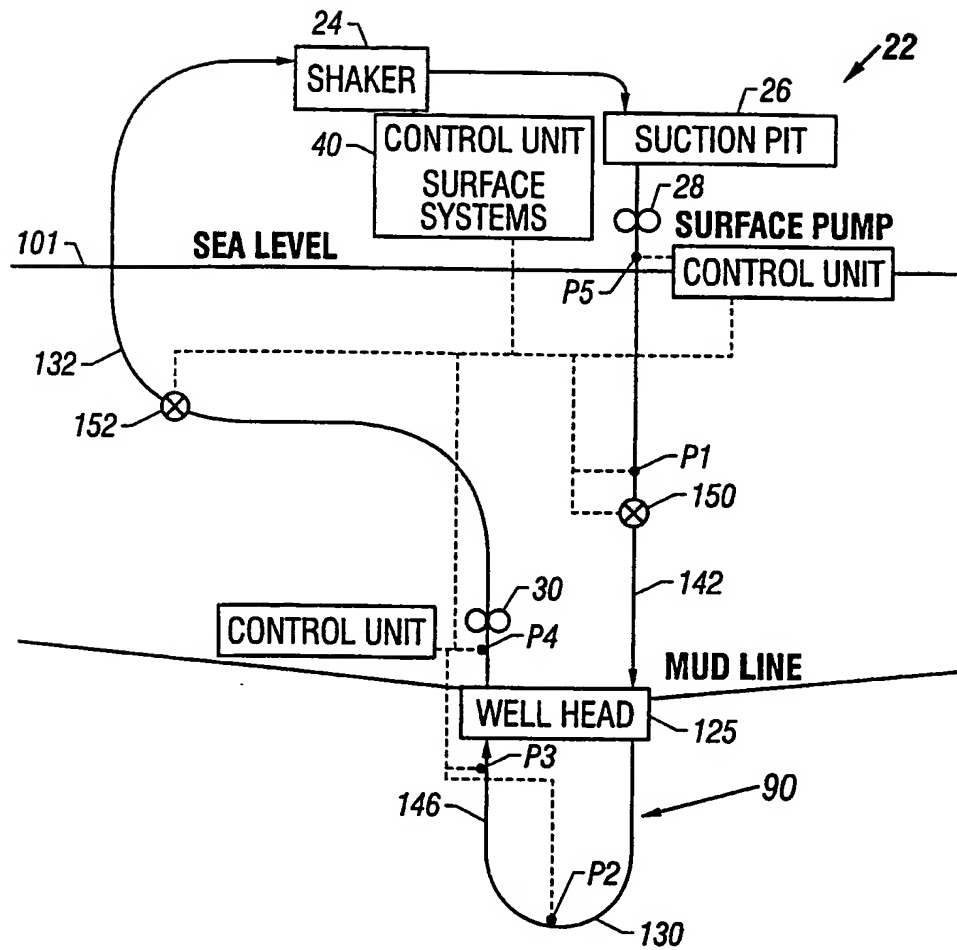


FIG. 2

3/4

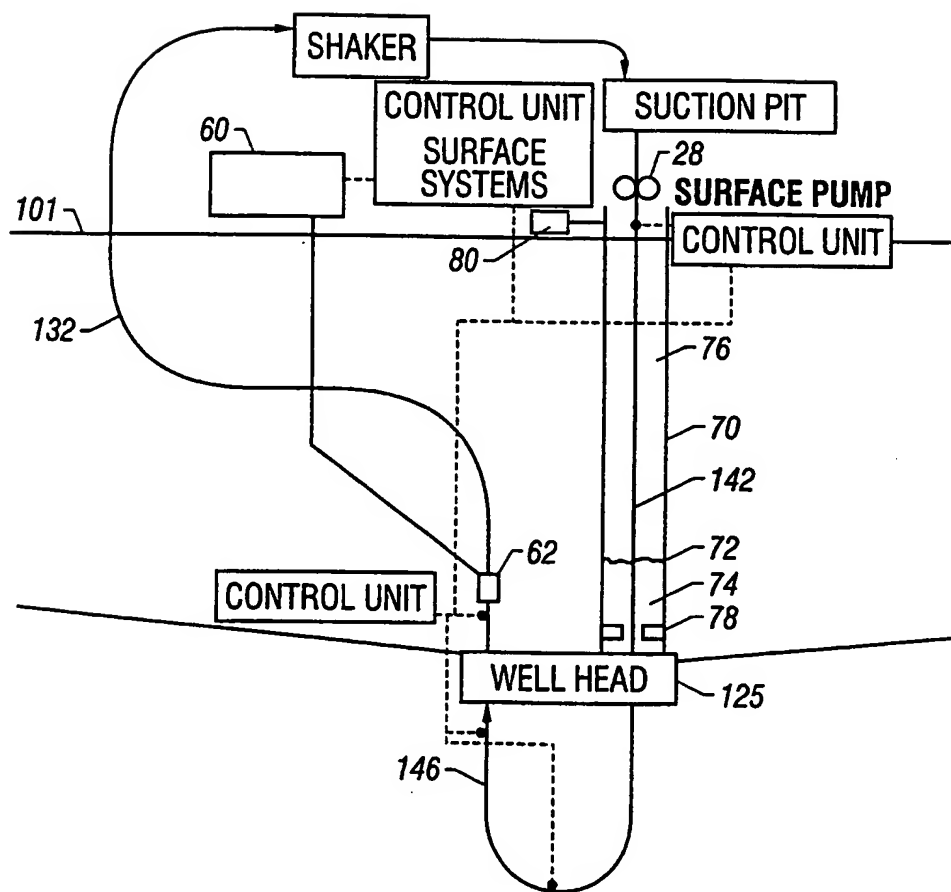


FIG. 3

4/4

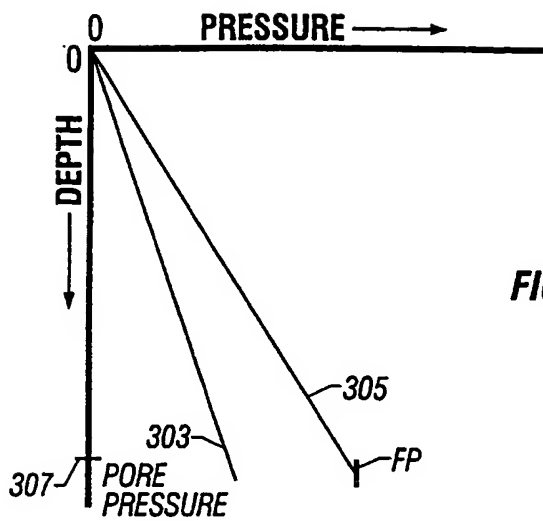


FIG. 4B


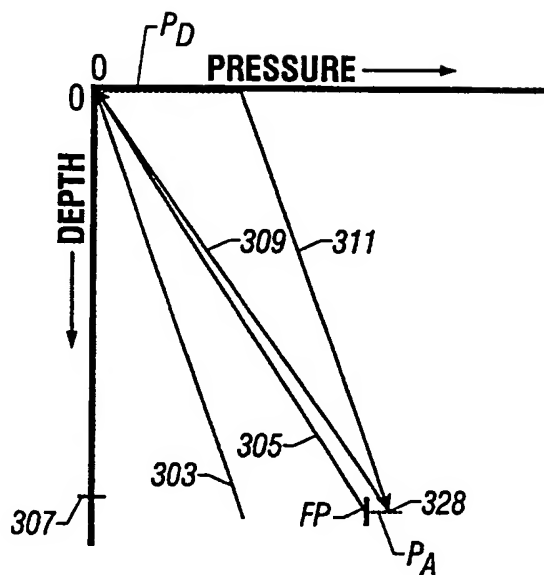


FIG. 4C

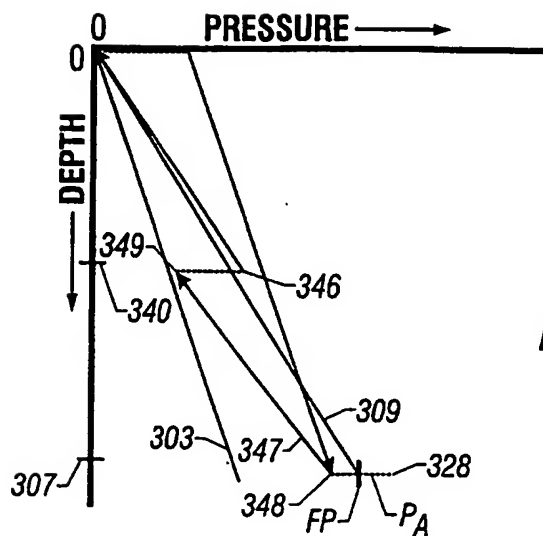

<p>(51) International Patent Classification ⁷ : E21B 21/08, 7/128, 21/00</p>	<p>A3</p>	<p>(11) International Publication Number: WO 00/04269 (43) International Publication Date: 27 January 2000 (27.01.00)</p>
<p>(21) International Application Number: PCT/US99/16150 (22) International Filing Date: 15 July 1999 (15.07.99) (30) Priority Data: 60/092,908 15 July 1998 (15.07.98) US 60/095,188 3 August 1998 (03.08.98) US 60/101,541 23 September 1998 (23.09.98) US 60/108,601 16 November 1998 (16.11.98) US (71) Applicant: DEEP VISION LLC [US/US]; 10th floor, 4 Greenway Plaza, Houston, TX 77046 (US). (72) Inventors: FINCHER, Roger; 23B Amherst Court, Conroe, TX 77304-1103 (US). WATKINS, Larry; 10915 Tulip Garden Court, Houston, TX 77065-3230 (US). MAY, Roland; Koenigsbergerstrasse 9, D-29225 Celle (DE). MCFARLANE, James, W.; 20203 Kempfords Court, Katy, TX 77450 (US). FONTANA, Peter; 3918 Byron, Houston, TX 77005 (US). (74) Agents: ROWOLD, Carl, A. et al.; Baker Hughes Incorporated, Suite 1200, 3900 Essex Lane, Houston, TX 77027 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> (88) Date of publication of the international search report: 20 April 2000 (20.04.00)</p>

The present invention provides drilling systems for drilling subsea wellbores. A suction pump coupled to the annulus is used to control the bottom hole pressure during drilling operations, making it possible to use heavier drilling muds and drill to greater depths than would be possible without the suction pump. Various pressure, temperature, flow rate and kick sensors included in the drilling system provide signals to a controller that controls the suction pump, the surface mud pump, a number of flow control devices, and the optional delivery system.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MX	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 99/16150

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 E21B21/08 E21B7/128 E21B21/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 063 602 A (HOWELL JAMES DAMRON ET AL) 20 December 1977 (1977-12-20) the whole document ---	1-9
X	EP 0 290 250 A (CONOCO INC) 9 November 1988 (1988-11-09) the whole document ---	1,6 10-15
A	US 4 291 772 A (BEYNET PIERRE A) 29 September 1981 (1981-09-29) abstract; figures 1,2 ---	1,6,10, 11 12-15
X	US 4 091 881 A (MAUS LEO DONALD) 30 May 1978 (1978-05-30) the whole document ---	10,11 12
A	---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 January 2000

Date of mailing of the international search report

- 3. 02. 2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Fonseca Fernandez, H

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/16150

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 4 134 461 A (BLOMSMA EVERHARD C) 16 January 1979 (1979-01-16)	10, 11
A	the whole document	12-15
A	US 3 955 411 A (LAWSON JR ERNEST E) 11 May 1976 (1976-05-11)	1, 10, 12
A	the whole document	
A	EP 0 437 872 A (ANADRILL INT SA ; SCHLUMBERGER SERVICES PETROL (FR)) 24 July 1991 (1991-07-24)	15
A	abstract	
A	US 4 210 208 A (SHANKS FORREST E) 1 July 1980 (1980-07-01)	
A	US 3 815 673 A (EXXON) 11 June 1974 (1974-06-11)	
A	WO 93 06335 A (RIG TECHNOLOGY LTD) 1 April 1993 (1993-04-01)	
A	US 5 168 932 A (OOSTERLING PETER ET AL) 8 December 1992 (1992-12-08)	

INTERNATIONAL SEARCH REPORT

information on patent family members

Int. Appl. No.

PCT/US 99/16150

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4063602 A	20-12-1977	NONE	
EP 0290250 A	09-11-1988	US 4813495 A CA 1305469 A DK 237488 A JP 63284397 A NO 881947 A	21-03-1989 21-07-1992 06-11-1988 21-11-1988 07-11-1988
US 4291772 A	29-09-1981	CA 1147646 A	07-06-1983
US 4091881 A	30-05-1978	NONE	
US 4134461 A	16-01-1979	GB 1546919 A NO 772730 A,B,	31-05-1979 07-02-1978
US 3955411 A	11-05-1976	NONE	
EP 0437872 A	24-07-1991	US 5063776 A CA 2032189 A NO 905163 A	12-11-1991 15-06-1991 17-06-1991
US 4210208 A	01-07-1980	NONE	
US 3815673 A	11-06-1974	CA 967550 A	13-05-1975
WO 9306335 A	01-04-1993	AU 2552792 A GB 2273948 A,B	27-04-1993 06-07-1994
US 5168932 A	08-12-1992	CA 2047587 A GB 2246444 A,B NO 912876 A	26-01-1992 29-01-1992 27-01-1992

THIS PAGE BLANK (USPTO)